



QOLTEC MONOLITH VOLTAGE CONVERTER 4000 MS WAVE |12V TO 230V | 2000/4000W | USB

PRICE: -,-- EUR

SHIPPING TIME: 24 HOURS

CATALOG NUMBER: 51928

EAN CODE: 5901878519289

PRODUCENT: QOLTEC

MOC ZNAMIONOWA: 2000W

MOC CAŁKOWITA (CHWILOWA): 4000W

NAPIĘCIE WEJŚCIOWE: 12V

NAPIĘCIE WYJŚCIOWE: 230V

PRZEBIEG NAPIĘCIA NA WYJŚCIU: MODYFIKOWANA FAŁA SINUSOIDALNA

CZĘSTOTLIWOŚĆ WYJŚCIOWA: 50 HZ $\pm$ 2HZ

PRĄD JAŁOWY: $\leq 0.4A$

SPRAWNOŚĆ: 90%

CHŁODZENIE: 2 X WENTYLATOR

PORTY USB: 5V/2A (QC 3.0 - 18W)

ZABEZPIECZENIA: UVP/OVP/OC/OTP/SCP

ZABEZPIECZENIE PRZED ODWROTNĄ POLARYZACJĄ:

BEZPIECZNIK

ZASTOSOWANIE: KOMPUTER, MONITOR, URZĄDZENIA BIUROWE, SPRZĘT RTV, KONSOLA DO GIER, SPRZĘT AUDIO/VIDEO, SERWERY, URZĄDZENIA MONITORUJĄCE, OŚWIETLENIE, MAŁE AGD, ŁADOWANIE URZĄDZEŃ MOBILNYCH

MATERIAŁ: ALUMINIUM

TEMPERATURA PRACY: -10°C ~ +50°C

TEMPERATURA PRZECHOWYWANIA: -30°C ~ +70°C

INFORMACJE DODATKOWE: FUNKCJA MIĘKKIEGO STARTU
ZALECAMY WYBÓR BATERII POWYŻEJ 30AH W ZESTAWIE DODATKOWE BEZPIECZNIKI

UWAGI: NIE ZAKRYWAJ OTWORÓW WENTYLACYJNYCH
URZĄDZENIA PAMIĘTAJ O PRAWDŁOWYM PODŁĄCZENIU PRZEWODÓW I POLARYZACJI NAPIĘCIA ZASILAJĄCEGO !
POBÓR MOCY NIE MOŻE PRZEKROCYĆ MAKSYMALNEJ MOCY PRZETWORNICY

WYMIARY (G/D X SZ X W): 180 X 350 X 73 MM

ZAWARTOŚĆ ZESTAWU: 1 X PRZETWORNICA NAPIĘĆ 4 X

PRZEWÓD PRZYŁĄCZENIOWY AKUMULATORA 8 X
BEZPIECZNIK 1 X INSTRUKCJA OBSŁUGI 1 X KARTA
GWARANCJI

GŁĘBOKOŚĆ / DŁUGOŚĆ OPAKOWANIA [MM]: 225

SZEROKOŚĆ OPAKOWANIA [MM]: 405

WYSOKOŚĆ OPAKOWANIA [MM]: 90

WAGA NETTO [KG]: 3.980

WAGA BRUTTO [KG]: 4.308

CERTYFIKAT: CE


GWARANCJA: 24 MIESIĄCE

ITEM DESCRIPTION

MODIFIED SINE WAVE - SIMPLE DESIGN, LOWER FAILURE RATE



DEVICES THAT DO NOT REQUIRE A PURE SINE WAVE SUCH AS A COMPUTER, LAPTOP, KETTLE, TOASTER WILL WORK WITHOUT ANY PROBLEM WITH A MODIFIED SINE WAVE INVERTER, **IT PRODUCES A SINUSOIDAL ALTERNATING VOLTAGE OUTPUT WITH A RECTANGULAR WAVEFORM WHOSE RMS VALUE IS THE SAME AS THE RMS VALUE OF THE SINUSOIDAL WAVEFORM** FOUND IN THE POWER GRID. THIS TYPE OF INVERTER IS ALL ABOUT **LOWER FAILURE RATES AND SIMPLE DESIGN.**

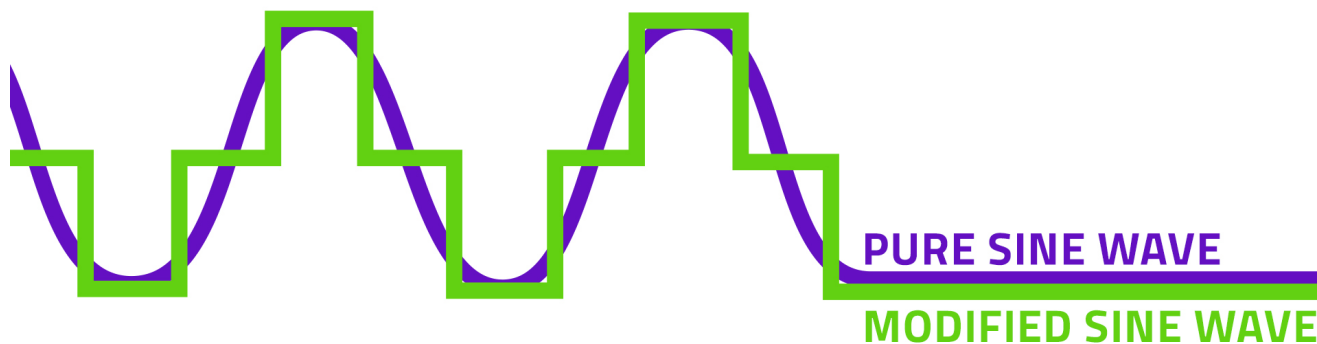

GIVE YOUR DEVICES THE RIGHT CONDITIONS TO WORK



WHEN CHOOSING A SUITABLE INVERTER, **IT IS WORTH PAYING ATTENTION TO THE POWER VALUE AND VOLTAGE OF THE BATTERY**, WHICH MUST BE CONSISTENT WITH THAT INDICATED ON THE INVERTER TO ENSURE THAT OUR EQUIPMENT HAS THE RIGHT CONDITIONS FOR WORK. ALSO **IMPORTANT IS THE NUMBER OF CONNECTED DEVICES**, FOR EXAMPLE, CONNECTING A LAPTOP AND A PRINTER, THE POWER OF BOTH DEVICES SHOULD BE ADDED UP. REMEMBER THAT **THE POWER CONSUMED BY THE CONNECTED DEVICE SHOULD NOT EXCEED 85% OF THE RATED POWER OF THE INVERTER**.

DON'T LOSE ENERGY ON THE JOURNEY



THE PRODUCT IS IDEAL AS A POWER SOURCE IN **CAMPERS OR TRAILERS DURING FAMILY TRIPS**. ARE YOU PLANNING A LONGER CAMPING OR LAKESIDE VACATION AND LOOKING FOR A WAY TO PLUG IN YOUR LAPTOP OR CHARGE YOUR PHONE ON THE YACHT ? IT IS WORTHWHILE TO BE WELL PREPARED. WITH A QOLTEC BRAND INVERTER, YOU WILL BE ABLE TO POWER YOUR DEVICES ANYWHERE AND ENJOY CONVENIENCE AND COMFORT. THE VOLTAGE CONVERTER WILL BE THE IDEAL POWER SOURCE FOR **YACHT AND BOAT OWNERS**. THIS SMART DEVICE WILL ALLOW YOU TO POWER YOUR EQUIPMENT DURING LONG TRIPS AWAY FROM HOME, IT HAS A USB PORT AND POWER OUTLETS TO WHICH YOU CAN PLUG ELECTRICAL DEVICES. WITHOUT ANY OBSTACLES, YOU CAN CHARGE YOUR PHONE, LAPTOP OR CONNECT ANY OTHER DEVICE WHOSE POWER DOES NOT EXCEED THE POWER OF THE INVERTER, WHAT'S MORE, YOU CAN CHARGE THE BATTERY AT THE SAME TIME. DEVICES WITH A POWER OF UP TO 150W SUCH AS A SMARTPHONE OR LAPTOP WHILE TRAVELING CAN BE POWERED BY ENERGY DRAWN FROM THE CIGARETTE LIGHTER SOCKET.

DEPENDING ON THE POWER CONSUMED BY THE DEVICE, THE INVERTER 2000W CAN POWER :

RTV EQUIPMENT : TV, GAME CONSOLE, MUSIC EQUIPMENT, RADIO,

OFFICE EQUIPMENT : COMPUTERS, PRINTERS, LAPTOPS,

THE INVERTER CAN ALSO BE USED NOT ONLY ON THE GO, BUT ALSO AS AN EMERGENCY POWER SOURCE TO

POWER EQUIPMENT AS A UPS DURING A TEMPORARY POWER OUTAGE FROM THE POWER GRID.

DURABLE AND LIGHTWEIGHT HOUSING



THE CASE IS DESIGNED FROM **HIGH QUALITY ALUMINUM** THAT IS RESISTANT TO **SHOCK AND MECHANICAL DAMAGE**. IT IS AN IDEAL CHOICE FOR THOSE WHO LIKE TO TRAVEL FOR LONG PERIODS OF TIME. THANKS TO THE INVERTER WITH BUILT-IN POWER SOCKET, YOU CAN USE ALMOST ANY DEVICE THAT REQUIRES CONNECTION TO THE SOCKET. THE PRODUCT HAS A **USB PORT** FOR CHARGING MOBILE DEVICES AND A **FAN** THAT TAKES CARE OF PROPER COOLING .

FULL GUARANTEE FOR SAFE USE



THE PRODUCT IS EQUIPPED WITH A NUMBER OF PROTECTIONS THAT GUARANTEE FULL PROTECTION FOR CONNECTED DEVICES. IN ADDITION, THE KIT INCLUDES A **SPARE FUSE** TO ENSURE THE LONGEST POSSIBLE OPERATION OF THE EQUIPMENT.

THE CONVERTER HAS :

UVP PROTECTION - PROTECTS DEVICES FROM TOO LOW VOLTAGE AT THE OUTPUT, WHICH AFFECTS THE STABILITY OF CONNECTED DEVICES,

SCP PROTECTION - IS A SHORT CIRCUIT PROTECTION,

OVP PROTECTION - IS PROTECTION AGAINST TOO HIGH OUTPUT VOLTAGE AND DAMAGE TO CONNECTED DEVICES,

OCP PROTECTION - IS PROTECTION AGAINST TOO HIGH CURRENT ON THE LINE,

OTP PROTECTION - IS PROTECTION AGAINST OVERHEATING.



CONFIDENCE CONFIRMED BY A WARRANTY

THE CASE IS DESIGNED FROM **HIGH QUALITY ALUMINUM** THAT IS RESISTANT TO **SHOCK AND MECHANICAL DAMAGE**. IT IS AN IDEAL CHOICE FOR THOSE WHO LIKE TO TRAVEL FOR LONG PERIODS OF TIME. THANKS TO THE INVERTER WITH BUILT-IN POWER SOCKET, YOU CAN USE ALMOST ANY DEVICE THAT REQUIRES CONNECTION TO THE SOCKET. THE PRODUCT HAS A **USB PORT** FOR CHARGING MOBILE DEVICES AND A **FAN** THAT TAKES CARE OF PROPER COOLING .